


REDUCING TEE

Model: RTE01

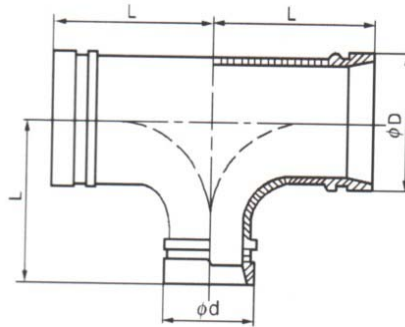

Nominal Size Inches	Pipe O.D. mm/in	Working Pressure psi/kPa	Nominal Dimensions			Net Weight
			L mm/in	D mm/in	d mm/in	Approx. kg
2x1 ¹ / ₂	60.3X48.3	500	82.5	60.5	48.0	1.20
	2.375X1.900	3450	3.25	2.382	1.89	
3X2	88.9X60.3	500	108.0	89.0	60.5	2.74
	3.500X2.375	3450	4.25	3.504	2.382	
4X1	114.3X33.4	500	127.0	114.3	33.5	4.35
	4.500X1.315	3450	5.00	4.50	1.319	
4X2	114.3X60.3	500	127.0	114.3	60.5	4.80
	4.500X2.375	3450	5.00	4.50	2.382	
4X3	114.3X88.9	500	127.0	114.3	89.0	4.94
	4.500X3.500	3450	5.00	4.50	3.504	
5X2	141.3X60.3	500	139.5	142.0	60.5	6.98
	5.563X2.375	3450	5.49	5.591	2.382	
6X2 ¹ / ₂	168.3X73.0	500	165.0	165.0	73.0	10.58
	6.625X2.875	3450	6.50	6.496	2.874	
6X4	168.3X114.3	500	165.0	165.0	114.3	11.66
	6.625X4.500	3450	6.50	6.496	4.500	
6X5	168.3X141.3	500	165.0	165.0	142.0	12.48
	6.625X5.563	3450	6.50	6.496	5.591	
8X2	219.1X60.3	500	197.0	219.5	60.5	18.71
	8.625X2.375	3450	7.76	8.642	2.382	
8X3	219.1X88.9	500	197.0	219.5	89.0	18.56
	8.625X3.500	3450	7.76	8.642	3.504	
8X4	219.1X114.3	500	197.0	219.5	114.3	16.18
	8.625X4.500	3450	7.76	8.642	4.50	

Material: Housing - Ductile iron conforming to ASTM A-536, Grade 65-45-12

Protective Coatings: ▪ Non-lead orange paint ▪ Fire brigade red (optional) non - lead paint
▪ Hot dipped galvanized conforming to ASTM A-153

Specifications, illustrated materials and descriptions are accurate as known at time of publication and are subject to change without notice.